





HATHORN[®]

INSPECTION CAMERAS

CATALOG

EFFECTIVE JANUARY 1, 2023

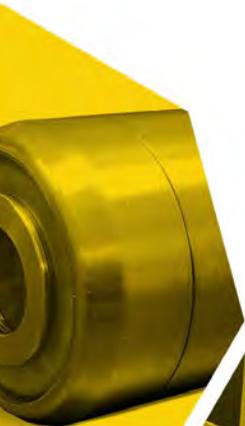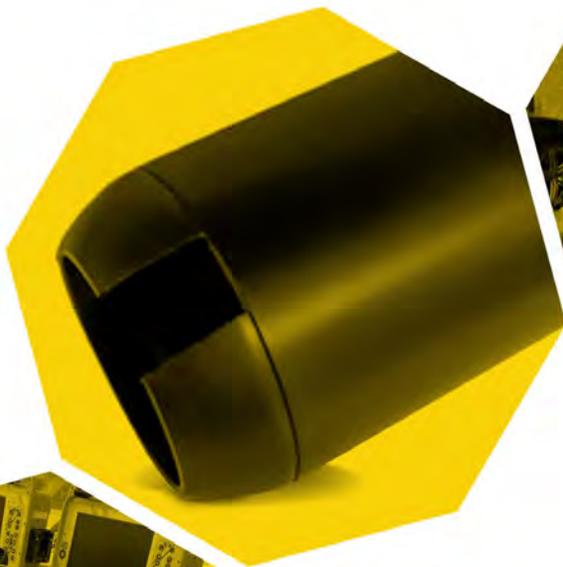

HATHORN CORP. CANADA
255 SHIELDS COURT
UNIT C
MARKHAM, ONTARIO
CANADA L3R 8V2
HATHORNCORP.COM
+1 (866) 428-4676



HATHORN USA
739 NORTH WILSON ROAD
COLUMBUS, OHIO
43204 USA
HATHORNCORP.COM
+1 (866) 428-4676

**MUNICIPAL GRADE.
LEGENDARY DURABILITY.
MADE IN NORTH AMERICA.**



TABLE OF CONTENTS

PAGE 1 - 12	CAMERA SYSTEMS
PAGE 13	PATCH CABLES AND LOCATORS
PAGE 14	ACCESSORIES
PAGE 15 - 16	CAMERA HEAD SKIDS
PAGE 17 - 18	CAMERA HEADS
PAGE 19	REPAIR CENTRES

Hathorn® manufactures push camera systems that are Municipal Grade and proudly designed and manufactured in North America, offering best in class value with the largest options suite in the industry.

Hathorn® has thousands of precision-built cameras in the field from California, to Canada, to Australia, proving that Hathorn® products operate in the harshest conditions, day after day, keeping you on the job for longer. If you are looking for a camera for pipe inspection jobs, look no further than Hathorn®.

HATHORN® H12+

CONTROL MODULE

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Light Weight
9.5lbs/4.5kg



Screen Shot
Function



Industry
Leading
Warranty



Compatible with
18V Milwaukee®
or Equivalent Batteries



Internal
Hard Drive
128GB or
512GB



Daylight
Readable
Display



Record
to USB &
HDD



HATHORN
Info Bar



Full Size
Keyboard



Camera LED
Light Control

The new Hathorn® H12+ control module is equipped with an industry leading impact resistant 12.1" LCD screen with almost three times the brightness of the "leading brand" making it the brightest monitor in its class. The H12+ is the pro's choice for any light condition, including direct sunshine, providing stunning picture quality, high contrast and up to 8X digital "pan & zoom" technology revealing details missed by other lateral push cameras.

With the H12+ you can save videos and screen shots to the internal memory or USB, operate in three menu languages, locate with dual 512Hz/640Hz high power sonde frequencies, imprint your company name with the on-screen information bar and 8 pages of text overlay, and extend your 18V external battery runtime with the built-in Hathorn® battery extender feature. It will even automatically save your videos before powering down due to a low battery. Never lose another inspection video again!

Whether you are working in brutal Canadian winters or hot Arizona summers, inside or outside, a new standard for features and quality has been set with the Hathorn® H12+.



HATHORN®
INSPECTION CAMERAS

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN® H12+

CONTROL MODULE

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA

Specifications

Display

Size & Type	12.1" (30.7cm) impact resistant LCD
Resolution & Brightness	XGA 1024 x 768 pixels with 1,300 cd/m2
Zoom	1X, 2X, 4X, 8X with digital pan feature

Recording, Storage & Features

Recording Options	MPEG4 video (H.264 at 3 fps) & JPEG screenshot
Storage Options	USB, HDD or USB & HDD
USB Capacity	USB 2.0 up to 32Gb
Hard Drive Capacity	128Gb SSD (standard) or 512Gb SSD (upgrade)
Keyboard	Full sized QWERTY with silicone cover
Camera Head LED	Dimming control 5% increments
Hathorn Info Bar	74 characters over two lines with time/date
Text Overlay	8 Pages - save, recall, hide, delete
Menu Languages	English, Spanish, French
Audio	Integrated microphone and speaker
Footage Counter	Feet or meters with reset function
Sonde Frequencies	High power 512Hz or 640Hz
Reel Compatibility	All Hathorn reels 100-500ft. (except Wi-Fi)

Power

Battery (not incl.)	Only Milwaukee® M18 18V or equivalent
Battery Life	~4hrs. using 3.0Ah
Battery Extender	Auto dimming & auto saving
AC/DC Adapter	12V - 4.1A (included)

Weight & Dimensions


Weight without Battery	9.5lb (4.3Kg)
Dimensions (L x W x H)	15" x 12" x 5.5" (38cm x 30cm x 14cm)

Environmental

Water Resistance	IP65 when lid closed / IP64 when lid open
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)



The Hathorn Info Bar at the bottom of the screen allows you to see battery life, speaker function, time and date, recording file location, zoom, sonde frequency/function and footage. The info bar is customizable allowing you to put your company or client info at the bottom of the screen, recorded throughout the video. The newly designed, intuitive menus allow for a minimal learning curve. You are up and running in minutes.

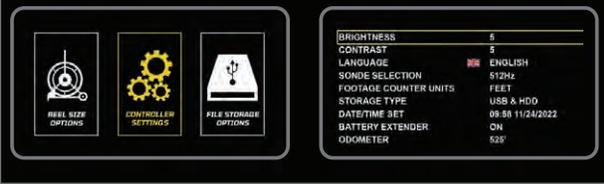

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN® DuraCAM

STANDARD CAMERAS

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Industry
Leading
Warranty



Self-Leveling
Camera Heads



200 ft. to
500 ft. of
Push Rod



512Hz or 640 Hz
High Power
Sonde



For Use with
Hathorn®
Command
Modules

Hathorn® DuraCAM camera reels are designed to work with any Hathorn® control module, past, present or future. These municipal grade camera reels come fitted with your choice of Hathorn® DuraCAM self-leveling or straight view camera heads all equipped with super bright cool running LEDs for optimal picture quality. Buttwelded steel frame construction, stainless steel camera heads and your choice of cable size allow you to push further than ever before and remain in the field longer with Hathorn's legendary reliability.

Hathorn® DuraCAM camera reels are trusted by plumbers, municipalities, general contractors, home inspectors, petrochemical companies, and mining engineers to deliver a clear, recordable video inspection every time the camera is used. Designed and manufactured in North America, with a full one-year warranty.



HATHORN®
INSPECTION CAMERAS

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN[®] DuraCAM

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA

STANDARD CAMERAS

Specifications

Display

Size & Type Compatible with all Hathorn control modules. H12+ recommended for best picture and options.

Features

Sonde Frequency High power 512Hz or 640Hz (available only with H12+ controller)

Push Rod HPDE push rod with coax core - multiple lengths and thicknesses

Weight & Dimensions

Weight See specific item in list to the right

Dimensions (L x W x H) See specific item in list to the right

Environmental

Water Resistance - Camera & Rod IP68 to 60psi

Water Resistance - Battery Cradle IP65

Water Resistance - Reel Hub IP63

Operating Temperature 14°F to 122°F (-10°C to 50°C)

Storage Temperature -4°F to 140°F (-20°C to 60°C)



Extra Large								
Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensions
XLR-5568/XLR-5568-SL	1.68"	Available	500 ft.	5/8"	3"	90 lbs.	12"	33" x 29" x 16"
XLR-5168/XLR-5168-SL	1.68"	Available	500 ft.	1/2"	3"	75 lbs.	12"	33" x 29" x 16"

Large								
Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensions
LR-4168-SL / LR-4168	1.68"	Available	400 ft.	1/2"	3"	65 lbs.	12"	33" x 29" x 16"
LR-3168-SL / LR-3168	1.68"	Available	300 ft.	1/2"	3"	55 lbs.	12"	33" x 29" x 16"
LR-2168-SL / LR-2168	1.68"	Available	200 ft.	1/2"	3"	45 lbs.	12"	33" x 29" x 16"
LR-4143-SL / LR-4143	1.43"	Available	400 ft.	1/2"	3"	65 lbs.	10"	33" x 29" x 16"
LR-3143-SL / LR-3143	1.43"	Available	300 ft.	1/2"	3"	55 lbs.	10"	33" x 29" x 16"
LR-2143-SL / LR-2143	1.43"	Available	200 ft.	1/2"	3"	45 lbs.	10"	33" x 29" x 16"

Mid								
Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensions
MR-2168-SL / MR-2168	1.68"	Available	200 ft.	1/2"	3"	42 lbs.	12"	29" x 18" x 15"
MR-2143-SL / MR-2143	1.43"	Available	200 ft.	1/2"	3"	42 lbs.	10"	29" x 18" x 15"
MR-2123-SL / MR-2123	1.23"	Available	200 ft.	.400"	2"	42 lbs.	6"	29" x 18" x 15"

Mini								
Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensions
MN-2123-SL / MN-2123	1.23"	Available	200 ft.	3/8"	2"	33 lbs.	6"	24" x 18" x 10"
MN-2100	1"	No	200 ft.	3/8"	1.5"	33 lbs.	4"	24" x 18" x 10"

* Skids are always recommended to protect camera head. Roller skids are recommended options for pipes larger than 8". Find these accessories and spare parts on our website - www.hathorncorp.com



North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN H7

CAMERA SYSTEM

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



*Industry
Leading
Warranty*



*Screen Shot
Function*



*Internal
Hard Drive
64GB or
128GB*



*Compatible with
18V Milwaukee®
or Equivalent Batteries*



*Record
to USB &
HDD*



*512Hz High
Power Sonde*



*200 ft. of
Push Rod
as Standard*



*Daylight
Readable
Display*



*Self-Leveling
Camera Heads*

The new Hathorn® H7 pipe inspection system offers a municipal grade product that is aimed at the residential plumbing, contracting and home inspection markets. This all-in-one system comes equipped with your choice of 200ft. of premium cable and Hathorn DuraCAM camera heads, all with cool running super bright LED lights.

The H7 leads the industry with its impact resistant 7" LCD screen having twice the brightness of comparable inspection cameras in its class. It will operate in any light condition, including direct sunshine, providing stunning picture quality revealing details missed by other lateral push cameras.

The H7 allows the user to save videos and screen shots to the internal hard drive or USB, operate in three menu languages and extend your 18V external battery runtime with the built-in Hathorn® battery extender feature. It will even automatically save your videos before powering down due to a low battery. Never lose another inspection video again!

Trusted by plumbers, home inspectors and contractors all over North America to deliver rugged dependability and portability. Designed and manufactured in North America, with a full one-year warranty. Whether you are working in brutal Canadian winters or hot Arizona summers, inside or outside, a new standard for features and quality has been set with the Hathorn® H7.



HATHORN®
INSPECTION CAMERAS

*North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com*

HATHORN H7

CAMERA SYSTEM

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA

Specifications

Display

Size & Type	7" (17.8cm) impact resistant daylight readable LCD
Resolution & Brightness	1024 x 600 pixels with 1,000 cd/m2

Recording, Storage & Features

Recording Options	MPEG4 video (H.264 at 30fps) and JPEG screenshot
Storage Options	USB, HDD or USB & HDD
USB Capacity	USB 2.0 up to 32Gb
Hard Drive Capacity	64Gb SSD (standard) or 128Gb SSD (upgrade)
Menu Languages	English, Spanish, French
Footage Counter	Feet or meters with reset function
Sonde Frequency	High power 512Hz
Push Rod	200ft. of HPDE push rod with coax core

Power

Battery	Only Milwaukee® M18 18V or equivalent (not incl.)
Battery Life	~5-6hrs using 3.0Ah (when not recording & sonde off)
Battery Extender	Auto dimming & auto saving
AC/DC Adapter	12V - 4.1A (included)

Weight & Dimensions

Weight without Battery	45lb (20Kg)
Dimensions (L x W x H)	33" x 19" x 16" (84cm x 48cm x 41cm)

Environmental

Water Resistance	IP65 when lid closed / IP64 when lid open
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)



Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Max. Pipe Well Lit
H7-2168-SL	1.68"	Yes	200 ft.	1/2"	3"	12"
H7-2168	1.68"	No	200 ft.	1/2"	3"	12"
H7-2143-SL	1.43"	Yes	200 ft.	1/2"	3"	10"
H7-2143	1.43"	No	200 ft.	1/2"	3"	10"
H7-2123-SL	1.23"	Yes	200 ft.	0.400" or 3/8"	2"	6"
H7-2123	1.23"	No	200 ft.	0.400" or 3/8"	2"	6"
H7-2100	1"	No	200 ft.	3/8"	1.5"	4"



North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN® H2

CAMERA SYSTEM

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Industry
Leading
Warranty



Compatible with
18V Milwaukee®
or Equivalent Batteries



100 ft. - 200 ft.
of Push Rod



512Hz High
Power Sonde



Self-Leveling
Camera Heads

Hathorn® M2 systems come standard with a 7" shatter resistant LCD monitor, 100ft. or 200ft. of premium push rod and your choice of straight-view or self-leveling DuraCAM camera heads, all with cool running super bright LED lights. New for 2023 Hathorn® has added an on-screen footage counter in feet and meters, as well as 512Hz high power sonde control.

Being aimed at the budget conscious user who wants a robust, easy to use system, without paying for extra options, the M2 camera system does not have a recording option. The M2 is an entry level inspection camera offering the same municipal grade quality and portability of our more expensive models. All Hathorn® products are compatible with 18V Milwaukee® batteries offering the M2 over 5 hours of runtime on a single charge.

Trusted by plumbers and contractors to deliver rugged dependability and portability. Designed and manufactured in North America, with a full one-year warranty.



HATHORN®
INSPECTION CAMERAS

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN[®] H2

CAMERA SYSTEM

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Specifications

Display

Size & Type	7" (17.8cm) impact resistant LCD
Resolution & Brightness	1024 x 600 pixels with 500 cd/m2

Features

Footage Counter	Feet or meters with reset function
Sonde Frequency	High power 512Hz
Push Rod	HPDE push rod with coax core

Power

Battery	Only Milwaukee [®] M18 18V or equivalent (not included)
Battery Life	~5-6hrs using 3.0Ah (when not recording & sonde off)
AC/DC Adapter	12V - 4.1A (included)

Weight & Dimensions

Weight without Battery	45lb (20Kg)
Dimensions (L x W x H)	33" x 19" x 16" (84cm x 48cm x 41cm)

Environmental

Water Resistance	IP65 when lid closed / IP64 when lid open
Operating Temperature	14°F to 122°F (-10°C to 50°C)
Storage Temperature	-4°F to 140°F (-20°C to 60°C)

Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90 Elbow	Max. Pipe Well Lit
H2-2168-SL	1.68"	Yes	200 ft.*	1/2"	3"	12"
H2-2168	1.68"	No	200 ft.*	1/2"	3"	12"
H2-2143-SL	1.43"	Yes	200 ft.*	1/2"	3"	10"
H2-2143	1.43"	No	200 ft.*	0.400"	3"	10"
H2-2123-SL	1.23"	Yes	200 ft.*	3/8"	2"	6"
H2-2123	1.23"	No	200 ft.*	3/8"	2"	6"
H2-2100	1.00"	No	200 ft.*	1/4"	1.5"	4"

*100 ft. Lengths of Push Rod Available.



North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN® DuraCAM

Wi-Fi CAMERAS

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Industry
Leading
Warranty



Wi-Fi Reel for Use
with Phone or Tablet



Stream &
Record to
Mobile Device



Compatible with
18V Milwaukee®
or Equivalent Batteries



200 ft. to
400 ft. of
Push Rod



512Hz High
Power Sonde



6 to 8 Hours
of Runtime on
a Single Charge



Self-Leveling
Camera Heads

Hathorn® DuraCAM Wi-Fi reels stream live video directly to your mobile device. By downloading the free Hathorn app (Apple/Android) users can record video, take screen shots, and make voice commentary. Files can be shared by text, email, through the cloud or by inserting a USB key into your mobile device. Required USB dongle sold separately.

All Hathorn® DuraCAM Wi-Fi reels are compatible with 18V Milwaukee® or equivalent batteries for the ultimate in portability. Each reel is fitted with your choice of cable size and self-leveling or straight view camera heads equipped with super bright cool running LEDs for optimal picture quality.

Butt welded steel frame construction, stainless steel camera heads and Hathorn's legendary reliability allow you to remain in the field longer. Hathorn® Wi-Fi camera reels are trusted by plumbers, contractors and home inspectors, to deliver clear recordable video inspections and screen shots every time the tool is used. Designed and manufactured in North America, with a full one-year warranty.



HATHORN®
INSPECTION CAMERAS

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN® DuraCAM

Wi-Fi CAMERAS

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Specifications

Display

Size & Type Dependent upon Apple/Android device used

Recording, Storage & Features

Video Recording MPEG4
 Screen Shot JPEG
 File Storage Mobile device, cloud or USB
 Footage Counter Feet or meters - resettable
 Sonde Frequency 512Hz
 Push Rod HPDE - 100 to 400ft. / 1/4" to 5/8"
 Start Up Time ~15 seconds

Power

Battery Only Milwaukee® M18 18V or equivalent
 (not included)
 Battery Life ~6-8 hrs. using 3.0Ah (sonde off)
 AC/DC Adapter 12V 4.1A (included)

Environmental

Water Resistance - Camera & Rod IP68 to 60psi
 Water Resistance - Battery Cradle IP65
 Water Resistance - Reel Hub IP63
 Operating Temperature 14°F to 122°F (-10°C to 50°C)
 Storage Temperature -4°F to 140°F (-20°C to 60°C)
 Wi-Fi Frequency IEEE802.11b/g/n



Large Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensi
WLR-4168-SL / WLR-4168	1.68"	Available	400 ft.	1/2"	3"	65 lbs.	12"	33" x 29"
WLR-3168-SL / WLR-3168	1.68"	Available	300 ft.	1/2"	3"	55 lbs.	12"	33" x 29"
WLR-2168-SL / WLR-2168	1.68"	Available	200 ft.	1/2"	3"	45 lbs.	12"	33" x 29"
WLR-4143-SL / WLR-4143	1.43"	Available	400 ft.	1/2"	3"	65 lbs.	10"	33" x 29"
WLR-3143-SL / WLR-3143	1.43"	Available	300 ft.	1/2"	3"	55 lbs.	10"	33" x 29"
WLR-2143-SL / WLR-2143	1.43"	Available	200 ft.	1/2"	3"	45 lbs.	10"	33" x 29"

Mid Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensi
WMR-2168-SL / WMR-2168	1.68"	Available	200 ft.	1/2"	3"	42 lbs.	12"	29" x 18"
WMR-2143-SL / WMR-2143	1.43"	Available	200 ft.	1/2"	3"	42 lbs.	10"	29" x 18"
WMR-2123-SL / WMR-2123	1.23"	Available	200 ft.	.400"	2"	42 lbs.	6"	29" x 18"

Mini Catalog #	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Weight	Max. Pipe	Dimensi
WMN-2123-SL / WMN-2123	1.23"	Available	200 ft.	3/8"	2"	33 lbs.	6"	24" x 18"
WMN-2100	1"	No	200 ft.	3/8"	1.5"	33 lbs.	4"	24" x 18"

* Skids are always recommended to protect camera head. Roller skids are recommended options for pipes larger than 8".
 Find these accessories and spare parts on our website - www.hathorncorp.com



North America 1-866-HATHORN
 International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN[®] MICRON

CAMERA REELS

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA



Industry
Leading
Warranty



Self-Leveling
Camera Heads



100 ft. of
Push Rod



512Hz or 640Hz
High Power Sonde



For Use with
Hathorn[®]
Command
Modules



Wi-Fi Reel for Use
with Phone or Tablet

Micron DuraCAM camera reels can be used with either Hathorn[®] control modules (H12+ recommended), or with your own mobile Apple/Android device, should you opt for the Wi-Fi option. The Wi-Fi option is a standalone camera system that allows live streaming and recording to up to three devices at the same time using Hathorn's free app. It is powered by an external Milwaukee[®]18V or compatible battery (sold separately), which can last over 6 hours.

Micron DuraCAM reels are trusted by plumbers, general contractors, and home inspectors to deliver high definition, recordable video inspections of small pipes 1.5" to 3". These municipal grade reels offer butt-welded steel frame construction and 100ft of premium 1/4" push rod. Both style of reel come equipped with your choice of DuraCAM 1" or 7/8" straight view camera heads fitted with super bright, cool running LEDs for optimal picture quality.

These features give Micron reels the ultimate in portability and allow you to stay in the field longer. Designed and manufactured in North America, with a full one-year warranty.



HATHORN[®]
INSPECTION CAMERAS

North America 1-866-HATHORN
International 1-905-604-7040
hathorncorp.com sales@hathorncorp.com

HATHORN[®] MICRON

PROUDLY DESIGNED AND MANUFACTURED IN NORTH AMERICA

CAMERA REELS

Wi-Fi Reel

Standard Reel



Micron Wi-Fi Specifications

Display

Size & Type Dependent upon Apple/Android device used

Recording, Storage & Features

Video Recording MPEG4
 Screen Shot JPEG
 File Storage Mobile device, cloud or USB
 Footage Counter Feet or meters, resettable
 Sonde Frequency 512Hz
 Push Rod HPDE - 100ft. of 1/4"
 Start Up Time ~15 seconds

Power

Battery Only Milwaukee[®] M18 18V or equivalent (not included)
 Battery Life ~6-8 hrs. using 3.0Ah (sonde off)
 AC/DC Adapter 12V 4.1A (included)
 Wi-Fi Frequency IEEE802.11b/g/n

Micron Catalog #	Wi-Fi	Camera Head	Self Leveling	Rod Length	Rod Size	Min. 90° Elbow	Max. Pipe	Weight	Dimensions
MC-1100	No	1"	No	100 ft.	1/4"	1.5"	3"	15 lbs.	16" x 12" x 10"
MC-1078	No	7/8"	No	100 ft.	1/4"	1.5"	3"	15 lbs.	16" x 12" x 10"
WMC-1100	Yes	1"	No	100 ft.	1/4"	1.5"	3"	16 lbs.	16" x 12" x 10"
WMC-1078	Yes	7/8"	No	100 ft.	1/4"	1.5"	3"	16 lbs.	16" x 12" x 10"

Standard Micron Specifications

Display

Size & Type Compatible with All Hathorn control modules.
 H12+ recommended for best picture & options.

Features


Sonde Frequency High power 512Hz or 640Hz (available only with H12+ controller)
 Push Rod HPDE - 100ft. of 1/4"
 Recording, Storage & Power Please refer to H12+ specifications

Weight & Dimensions

Weight 15lbs. (without battery)
 Dimension (L x W x H) 16" x W 12" x 10"

Environmental

Water Resistance - Camera and Rod IP68 to 60psi
 Water Resistance - Battery Crade IP65
 Water Resistance - Reel Hub IP63
 Operating Temperature 14°F to 122°F (-10°C to 50°C)
 Storage Temperature -4°F to 140°F (-20°C to 60°C)

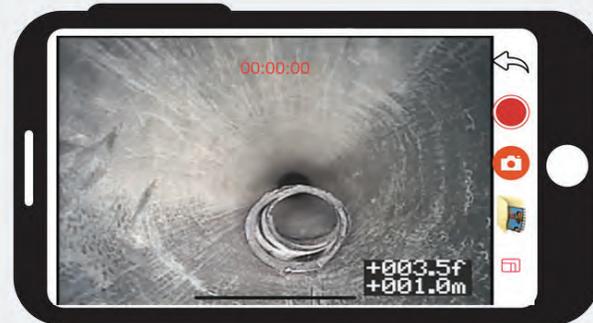

North America 1-866-HATHORN
 International 1-905-604-7040
 hathorncorp.com sales@hathorncorp.com

PATCH CABLES

Hathorn manufactures its connection cables to ensure a reliable signal between camera reel and monitor for the life of the product. No plastic connectors at Hathorn, only military grade.



Part Number: **10100**

Patch Cable for Optimum & Magnum Systems (Silver/Black).



Part Number: **10149**

Patch Cable for Keyhole Gas Camera System (Black/Black).

LOCATORS

Hathorn offers Snaptrack® Locators made in the USA by Rycom®. The Snaptrack® comes configured to the industry standard 512hz sonde locating frequency right out of the box. Just turn it on and get to work. For advanced users the Snaptrack® also has additional frequencies, sonde and line trace frequencies for use with reel upgrades, and additional utility locating equipment.



Part Number: **10179**

Multi-frequency Snap Track Locator.



Part Number: **10181**

Snap Track 3-Watt Transmitter.

**PROUDLY BUILT IN
NORTH AMERICA!**



ACCESSORIES

Controller mounts, power supplies, camera head skids and brake handles - Hathorn carries all the accessories you need to upgrade and maintain your camera system.



Part Number: **10104**

12V Power Supply.



Part Number: **10140**

Mounting bracket complete with Pin & Shaft for large and extra large reels.



Part Number: **90204**

Pin for reel mounting bracket.



Part Number: **10128**

Shaft for controller mounting bracket.



Part Number: **10119**

Small brake handle for mini/mid reels.



Part Number: **10120**

Large brake handle for standard reel.



Part Number: **10121**

Rubber foot for reel.



Part Number: **10001232**

6" x 1 1/2" wheel for ACE, ACE2, M2 and M7.



Part Number: **10122**

8" x 1 3/4" Wheel.

CAMERA HEAD SKIDS

Skids are available for all Hathorn Camera heads. Skids are used to protect your camera head from damage and also to raise the head out of standing water and center the camera in the pipe. It is recommended that users always use a skid on their camera heads so as to protect their investment.



Part Number: **10108**

P-Trap Skid for **1.68"**
Camera Heads.



Part Number: **10140**

P-Trap Skid for **1.43"**
Self-Leveling Camera Head.



Part Number: **10109**

3" Grooved Skid for **1.68"**
Camera Heads.



Part Number: **10160**

3" Grooved Skid for **1.43"**
Self-Leveling Camera Head.



Part Number: **10187**

P-Trap Skid for **1.43"** Straight
View Camera Head.




Part Number: **10123**

P-Trap Skid for **1.23"** Mini
Straight View Camera Head.



**MUNICIPAL GRADE,
LEGENDARY DURABILITY
AND AFFORDABILITY.**

**SCAN the QR Code to visit
our website and see what
else Hathorn has to offer!**

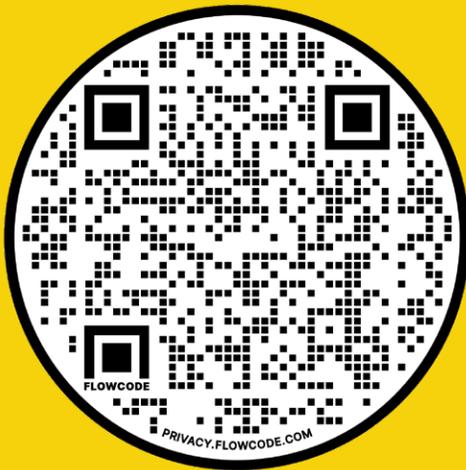

Part Number: **10137**

P-Trap Skid for 1.23" Mini
Self-Leveling Camera Head.



Part Number: **10188**

Grooved Skid for Micron 1"
Camera Head.



Part Number: **10137TOW**

Tow Skid for 1.23" Camera Head.



Part Number: **10162**

Universal Roller Skid for 1.68"
Camera Head for 6" - 12" Pipes.



Part Number: **10161**

Universal Roller Skid for 1.43"
Camera Head for 6" - 12" Pipes.



Part Number: **10163**

Mini Roller Skid for 1.23" for
4" - 6" Pipes.

CAMERA HEADS

Hathorn offers a full line of replacement camera heads to repair or upgrade your Hathorn system.

PART NUMBER	DESCRIPTION	PRODUCT IMAGE
10114	1.68" Color Straight View Camera Head - Stainless Steel	
10115	1.68" Color Self-Leveling Camera Head - Stainless Steel	
10116	1.68" Color Self-Leveling Camera Head - Aluminum Stainless Steel	
10132	1.68" Color Straight View Camera Head - Aluminum Stainless Steel	
10185	1.43" Color Straight View Camera Head - Stainless Steel	

CAMERA HEADS

PART NUMBER	DESCRIPTION	PRODUCT IMAGE
10139	1.43" Color Self-Leveling Camera Head - Stainless Steel	
10124	1.23" Color Straight View Camera Head - Stainless Steel	
10136	1.23" Color Self-Leveling Camera Head - Stainless Steel	
90393	1" Straight View Camera Head - Stainless Steel	
90356	7/8" Straight View Camera Head - Stainless Steel	



REPAIR CENTRES

If you need us we're always close! We have a network of Authorized Service and Repair Dealers throughout the United States, Canada and Australia. Contact them for plumbing and drains camera service or repair.

To get more specific location information, visit

www.hathorncorp.com/repaircentres



**HATHORN CORP.
CANADA**

255 Shields Court, Unit C
Markham, Ontario, Canada
L3R 8V2
+1 (866) 428-4676

**HATHORN
USA**

739 North Wilson Road
Columbus, Ohio
43204
+1 (866) 428-4676

CALL US AT

1 (866) HATHORN,

EMAIL US AT SALES@

HATHORNCORP.COM OR

LOOK FOR YOUR LOCAL

DEALER AT

HATHORNCORP.COM



HATHORN[®]
INSPECTION CAMERAS